


JC02 Rec'd PCT/PTO 2 8 MAR 2002

FORM PTO-1390 (REV 10-94)		U.S. DEPARTMENT OF COMMERCE PATENT AND TRADEMARK OFFICE	ATTORNEY'S DOCKET NUMBER 10873.866USWO
TRANSMITTAL LETTER TO THE UNITED STATES DESIGNATED/ELECTED OFFICE (DO/EO/US) CONCERNING A FILING UNDER 35 U.S.C. 371			U.S. APPLICATION NO. (If known, see 37 C.F.R. 1.5) Filed herewith <b>10, 089402</b>
INTERNATIONAL APPLICATION NO. PCT/JP00/06292	INTERNATIONAL FILING DATE September 13, 2000	PRIORITY DATE CLAIMED October 19, 1999	
TITLE OF INVENTION OPTICAL RECORDING MEDIUM, SUBSTRATE FOR OPTICAL RECORDING MEDIUM AND OPTICAL DISK DEVICE			
APPLICANT(S) FOR DO/EO/US AKIYAMA et al.			
Applicant herewith submits to the United States Designated/Elected Office (DO/EO/US) the following items and other information:			
<ol style="list-style-type: none"> <li>1. <input checked="" type="checkbox"/> This is a <b>FIRST</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>2. <input type="checkbox"/> This is a <b>SECOND</b> or <b>SUBSEQUENT</b> submission of items concerning a filing under 35 U.S.C. 371.</li> <li>3. <input checked="" type="checkbox"/> This express request to begin national examination procedures (35 U.S.C. 371(f)) at any time rather than delay examination until the expiration of the applicable time limit set in 35 U.S.C. 371(b) and PCT Articles 22 and 39(l).</li> <li>4. <input checked="" type="checkbox"/> A proper Demand for International Preliminary Examination was made by the 19th month from the earliest claimed priority date.</li> <li>5. <input checked="" type="checkbox"/> A copy of the International Application as filed (35 U.S.C. 371(c)(2))             <ol style="list-style-type: none"> <li>a. <input checked="" type="checkbox"/> is transmitted herewith (required only if not transmitted by the International Bureau).</li> <li>b. <input checked="" type="checkbox"/> has been transmitted by the International Bureau.</li> <li>c. <input type="checkbox"/> is not required, as the application was filed in the United States Receiving Office (RO/US)</li> </ol> </li> <li>6. <input checked="" type="checkbox"/> A translation of the International Application into English (35 U.S.C. 371(c)(2)).</li> <li>7. <input checked="" type="checkbox"/> Amendments to the claims of the International Application under PCT Article 19 (35 U.S.C. 371(c)(3))             <ol style="list-style-type: none"> <li>a. <input type="checkbox"/> are transmitted herewith (required only if not transmitted by the International Bureau).</li> <li>b. <input type="checkbox"/> have been transmitted by the International Bureau.</li> <li>c. <input type="checkbox"/> have not been made; however, the time limit for making such amendments has NOT expired.</li> <li>d. <input checked="" type="checkbox"/> have not been made and will not be made.</li> </ol> </li> <li>8. <input type="checkbox"/> A translation of the amendments to the claims under PCT Article 19 (35 U.S.C. 371(c)(3)).</li> <li>9. <input checked="" type="checkbox"/> An oath or declaration of the inventor(s) (35 U.S.C. 371 (c)(4)).</li> <li>10. <input checked="" type="checkbox"/> A translation of the annexes to the International Preliminary Examination Report under PCT Article 36 (35 U.S.C. 371(c)(5)).</li> </ol>			
<b>Items 11. to 16. below concern document(s) or information included:</b>			
11. <input type="checkbox"/> An Information Disclosure Statement under 37 CFR 1.97 and 1.98			
12. <input checked="" type="checkbox"/> An assignment document for recording. A separate cover sheet in compliance with 37 CFR 3.28 and 3.31 is included.			
13. <input type="checkbox"/> A FIRST preliminary amendment. <input type="checkbox"/> A SECOND or SUBSEQUENT preliminary amendment.			
14. <input type="checkbox"/> A substitute specification.			
15. <input type="checkbox"/> A change of power of attorney and/or address letter.			
16. <input checked="" type="checkbox"/> Other items or information: PCT Request with its English translation; Form PCT/IB/301; Form PCT/IB/304; Form PCT/IB/308; Form PCT/IB/332; Form PCT/IB/338; Form PCT/IB/301, International Preliminary Examination Report with its English translation; Written Amendment; Written Reply.			

U.S. APPLICATION NO. (If known, see 37 C.F.R. 1.55) Filed herewith <b>10,089402</b>		INTERNATIONAL APPLICATION NO PCT/JP00/06292		ATTORNEY'S DOCKET NUMBER 10873.866USWO	
17. [X] The following fees are submitted:  <b>BASIC NATIONAL FEE (37 CFR 1.492(a) (1)-(5)):</b> Search Report has been prepared by the EPO or JPO.....\$890.00  International preliminary examination fee paid to USPTO (37 CFR 1.492(a)(1)).....\$710.00  No international preliminary examination fee paid to USPTO (37 CFR 1.482) but international search fee paid to USPTO (37 CFR 1.445(a)(2)).....\$740.00  Neither international preliminary examination fee (37 CFR 1.482) nor international search fee (37 CFR 1.445(a)(3)) paid to USPTO ..... \$1040.00  International preliminary examination fee paid to USPTO (37 CFR 1.482) and all claims satisfied provisions of PCT Article 33(2)-(4) .....\$100.00				<b>CALCULATIONS      PTO USE ONLY</b>	
<b>ENTER APPROPRIATE BASIC FEE AMOUNT =</b>				\$890.00	
Surcharge of <b>\$130.00</b> for furnishing the oath or declaration later than [ ] 20 [ ] 30 months from the earliest claimed priority date (37 CFR 1.492(e)).				\$	
CLAIMS	NUMBER FILED	NUMBER EXTRA	RATE		
Total claims	6                      -20 = 0		X \$18.00	\$0.00	
Independent claims	3                      -3 = 0		X \$80.00	\$0.00	
MULTIPLE DEPENDENT CLAIM(S) (if applicable)			+ \$260.00	\$0.00	
<b>TOTAL OF ABOVE CALCULATIONS =</b>				\$890.00	
Reduction by 1/2 for filing by small entity, if applicable. Small entity status is claimed pursuant to 37 CFR 1.27				\$0.00	
<b>SUBTOTAL =</b>				\$890.00	
Processing fee of <b>\$130.00</b> for furnishing the English translation later than [ ] 20 [ ] 30 months from the earliest claimed priority date (37 CFR 1.492(f)).				+ \$0.00	
<b>TOTAL NATIONAL FEE =</b>				\$890.00	
Fee for recording the enclosed assignment (37 CFR 1.21(h)). The assignment must be accompanied by an appropriate cover sheet (37 CFR 3.28, 3 31) \$40.00 per property				+ \$40.00	
<b>TOTAL FEES ENCLOSED =</b>				\$930.00	
				Amount to be: refunded	\$930.00
				charged	\$
a. [X] Check(s) in the amount of \$890.00 and \$40.00 to cover the above fees is enclosed.  b. [ ] Please charge my Deposit Account No. _____ in the amount of \$ _____ to cover the above fees. A duplicate copy of this sheet is enclosed.  c. [X] The Commissioner is hereby authorized to charge any additional fees which may be required, or credit any overpayment to Deposit Account No. <u>13-2725</u> .					
<b>NOTE: Where an appropriate time limit under 37 CFR 1.494 or 1.495 has not been met, a petition to revive (37 CFR 1.137(a) or (b)) must be filed and granted to restore the application to pending status.</b>					
SEND ALL CORRESPONDENCE TO Douglas P. Mueller MERCHANT & GOULD P.O. Box 2903 Minneapolis, MN 55402-0903			SIGNATURE:   NAME: Douglas P. Mueller  REGISTRATION NUMBER: 30,300		

10/PRTS

10/089402  
JC10 Rec'd PCT/PTO 28 MAR 2002

## DESCRIPTION

### OPTICAL RECORDING MEDIUM, SUBSTRATE FOR OPTICAL RECORDING MEDIUM AND OPTICAL DISK DEVICE

5

#### TECHNICAL FIELD

The present invention relates to an optical recording medium for recording and/or reproducing information by irradiation with a laser beam or the like, a substrate for the optical recording medium, and an optical disk device.

10

#### BACKGROUND ART

Among optical recording media that have come into focus as large-capacity and high-density memories is an erasable optical recording medium that allows rewriting of information. Currently, the development of the erasable optical recording medium has been underway. In one form of the erasable optical recording medium, information is recorded and erased utilizing thermal energy generated by irradiation with a laser beam. The recording medium includes a transparent substrate of a general disk shape and a recording layer provided on the substrate. The recording layer is formed of a thin film in which a phase change is caused between an amorphous state and a crystalline state.

15

20

25

30

Phase change materials known to be used for the recording layer include an alloy film mainly containing elements such as Ge, Sb, Te, and In of, for example, a GeSbTe alloy. In many cases, information is recorded in such a manner that the recording layer is partially brought into an amorphous state to form a mark and erased in such a manner that the mark in the amorphous state is brought into a crystalline state. When heated to a temperature equal to or higher than the melting point and subsequently cooled at a speed higher than a fixed speed, the recording layer is brought into the amorphous state. When heated to a temperature equal to or higher than the crystallization temperature and equal to or lower than the melting point, the recording layer is brought into the crystalline state.

35

Generally, on the substrate, guide grooves (grooves) in the form of a spiral or concentric circles for tracking a laser beam in recording and reproducing information and addresses for indicating a position on the

recording medium, each composed of uneven strings of pits, are provided to form an initial state of the substrate. A region between the adjoining grooves is referred to as a land. In many cases, information is recorded on one of the groove and the land, and the other serves as a guard band for separating adjoining recording tracks from each other.

In recent years, the improvement in processing capabilities of various kinds of information-processing equipment has allowed the processing of an increasing amount of information. Thus, a recording medium has been requested to allow larger-capacity information recording and reproducing. In order to attain this, DVD-RAM or the like has employed a method in which information is recorded on both of the groove and the land, so that a higher track density can be obtained. In this case, the groove and the land are set so as to be substantially equal in width. Recording media of this kind have employed a method in which address information is recorded in an intermediate position between a pair of adjoining groove and land tracks so that with respect to the pair of adjoining groove and land tracks, one address information is recorded.

An address recorded in this manner in the intermediate position between the pair of adjoining groove and land tracks is referred to as "an intermediate address". Further, a method in which the intermediate address is used to record address information so that the address information is shared by a pair of adjoining tracks is referred to as "an intermediate address method".

In JP10(1998)-31822 A, a method of demodulating address information in a recording medium employing the intermediate address method is disclosed. In the method, a sum signal or a difference signal of electric signals output from a photodetector provided in an optical head of an optical disk device is used to demodulate the address information. The photodetector includes light receiving parts divided into two parts in a direction parallel to tracks on the recording medium.

In this connection, a signal quality assessment was conducted using reproduction signals obtained by reproducing an address on a recording medium formed in the following manner. As shown in FIG. 10, address pits 9 were arranged in the form of staggered pit strings so that with respect to a distance (a track pitch)  $T_p$  between a center line of a groove track 7 and a center line of a land track 8, center lines of strings of the address pits 9 were shifted in a radial direction of the recording medium (namely, a direction

perpendicular to the tracks) at a distance of about  $T_p/2$  from the center lines  
 of the groove tracks 7 and the center lines of the land tracks 8. In the  
 recording medium, a pit width  $W$  of the address pits 9 was the same as the  
 track pitch  $T_p$  (namely, the same as the width of the groove track 7 and the  
 width of the land track 8). As a result, the reproduction signals obtained by  
 reproducing the address differed in symmetry between the sum signal and  
 the difference signal. For each of the sum signal and the difference signal,  
 an optimum condition under which excellent signal quality could be obtained  
 was found by adjusting the lengths of the address pits. However, no  
 condition was found under which such signal quality could be obtained for  
 both of the sum signal and the difference signal at the same time.

That is, neither of the following cases allows sufficient signal quality  
 to be obtained, which has led to a problem of a limited margin for  
 reproduction conditions. In one case, a recording medium suited for address  
 information demodulation using the sum signal is employed in an optical  
 disk device in which address information demodulation is performed using  
 the difference signal. In the other case, a recording medium suited for  
 address information demodulation using the difference signal is employed in  
 an optical disk device in which address information demodulation is  
 performed using the sum signal. In other words, in each of the optical disk  
 devices in which address information demodulation is performed using the  
 sum signal and the difference signal, respectively, a permissible level of  
 variations in address forming conditions of recording media is limited.

## DISCLOSURE OF THE INVENTION

The present invention is intended to solve the conventional problem  
 as described above. It is an object of the present invention to provide an  
 optical recording medium that allows reliable address information  
 reproduction using either a sum signal or a difference signal of electric  
 signals output from a photodetector provided in an optical head of an optical  
 disk device, thereby enhancing compatibility of the optical disk device being  
 used and a substrate for the optical recording medium. It is another object  
 of the present invention to provide an optical disk device that allows an  
 increased reproduction margin in demodulating address information,  
 thereby achieving high-accuracy address detection.

In order to achieve the aforementioned objects, an optical recording  
 medium (or a substrate for the optical recording medium) of the present

invention is an optical recording medium (or a substrate for the optical recording medium) employing the intermediate address method, in which an address pit width (namely, a length of an address pit in an intermediate position of a depth (or a height) of a concave or a convex of the address pit in a radial direction of the recording medium)  $W$  satisfies the relationship:

$$W = k \cdot T_p / (\lambda / NA)$$

$$0.40 \leq k \leq 0.68$$

with respect to a laser wavelength  $\lambda$  and a numerical aperture  $NA$  of an objective lens of an optical head of an optical disk device being used, and a track pitch  $T_p$  of the recording medium. According to this configuration, address information can be reproduced with reliability using either a sum signal or a difference signal of electric signals output from light receiving parts, divided into two parts in a direction parallel to tracks, of a photodetector provided in the optical head of the optical disk device, thereby enhancing compatibility of the optical disk device being used.

Furthermore, an optical disk device of the present invention includes a first address demodulating circuit for demodulating address information using the sum signal and a second address demodulating circuit for demodulating address information using the difference signal, and thus an address can be detected with high accuracy based on information obtained from the first and second address demodulating circuits.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 is a plan view schematically showing the configuration of an optical recording medium of an embodiment according to the present invention.

FIG. 2 is a fragmentary enlarged plan view of the optical recording medium of the embodiment according to the present invention.

FIG. 3 is a block diagram showing a first configuration of a conventional optical disk device for an optical recording medium.

FIG. 4 is a structural view showing an optical head of the conventional optical disk device for the optical recording medium.

FIG. 5 is a block diagram showing a second configuration of the conventional optical disk device for the optical recording medium.

FIG. 6 shows waveforms of address reproduction signals.

FIG. 7 is a graph showing the relationship between a pit width of an address and asymmetry of reproduction signals obtained by reproducing the



shown) provided on the recording layer 6, formed of an ultraviolet hardening resin. The GeSbTe alloy thin film is brought into a crystalline state by irradiation with a laser beam to form an initial state of the film. The recording layer 6 has a reflectance of about 20% with respect to a light beam having a wavelength of 650 nm. The substrate 5 includes a center hole 2 for fitting the optical recording medium to an optical disk device, tracks 3 in the form of a spiral, and addresses 4 for indicating a position on the optical recording medium. In FIG. 1, the tracks 3 and the addresses 4 are shown exemplarily in the form of exaggerated portions of the tracks 3 and the addresses 4, respectively.

In FIG. 2, the tracks 3 are composed of groove tracks 7 having a depth of about 65 nm and a width of about 0.62  $\mu\text{m}$  and land tracks 8 having a width of about 0.62  $\mu\text{m}$  that are provided alternately. Information is recorded on both of the groove tracks 7 and the land tracks 8. The address 4 is encoded by a (8-16) modulation method and composed of uneven strings of pits (address pits) 9 and spaces. The address pits 9 have a length L varied between 3T and 11T by 0.5T with respect to a reference clock T. The address pits 9 having a depth of about 65 nm are arranged in the form of staggered pit strings so that center lines of strings of the address pits 9 are shifted in a radial direction of the recording medium (namely, a direction perpendicular to the tracks 3) at a distance of about 0.31  $\mu\text{m}$ , which is one-half a track pitch  $T_p$  (namely, the width of the groove tracks 7 and the width of the land tracks 8) from center lines of the groove tracks 7 and center lines of the land tracks 8. In the test conducted this time, substrates were prepared by varying the width W of the address pits 9 between 0.23  $\mu\text{m}$  and 0.40  $\mu\text{m}$  and used. These substrates were molded by an injection molding method using a stamper made of Ni.

FIGs. 3 and 5 are block diagrams exemplarily showing optical disk devices used in the test. FIG. 3 shows the optical disk device in which address information is demodulated using a sum signal 15S of electric signals output from a photodetector. In FIG. 3, the recording medium 1 shown in FIG. 1 is mounted to the optical disk device. FIG. 4 shows the structure of an optical head 14 of the optical disk device.

In FIG. 4, a light beam emitted from a semiconductor laser as a light source 23 is focused on the recording medium 1 through a collimator lens 24, a beam splitter 25, a 1/4 wave plate 26, and an objective lens 27. A focal point of the light beam is controlled so as to be on the recording layer 6 in the



recording medium 1 by adjusting the position of the objective lens 27 using a voice coil 28. The light beam reflected from the recording layer 6 goes back to the beam splitter 25 through the objective lens 27 and the 1/4 wave plate 26. Then, the light beam is reflected from the beam splitter 25 and is  
5 incident on a photodetector 20 to be converted to an electric signal. The photodetector 20 includes light receiving parts 21 and 22 divided into two parts in a direction parallel to the tracks on the recording medium 1. The semiconductor laser 23 has a laser wavelength of 650 nm and the objective lens 27 has a numerical aperture of 0.60.

10 The optical disk device shown in FIG. 3 includes a spindle motor 10 for rotating the recording medium 1 mounted thereto, a controller 11 for receiving and transmitting data 11S to be recorded or reproduced or the like, a modulator 12 for converting data to be recorded to a recording signal, a  
15 laser driving circuit 13 for driving the semiconductor laser according to the recording signal, and the optical head 14 having the semiconductor laser for focusing a laser beam on the recording medium 1 to record information and obtaining a reproduction signal using the reflected laser beam. The optical disk device further includes a summing amplifier 15 for outputting the sum  
20 signal 15S of electric signals output from the light receiving parts 21 and 22 of the photodetector 20 provided in the optical head 14, a differential amplifier 16 for outputting a difference signal 16S of electric signals output from the light receiving parts 21 and 22, an address demodulating circuit 17 for demodulating address information using the sum signal 15S, a data  
25 demodulating circuit 18 for demodulating data recorded on the tracks using the sum signal 15S, and a tracking controlling circuit 19 for controlling the optical head 14 so that a laser beam scans a track on the recording medium 1 properly based on the difference signal 16S.

FIG. 5 shows the optical disk device in which address information is demodulated using a difference signal 16S of electric signals output from a  
30 photodetector 20. The optical disk device has substantially the same configuration as that of the optical disk device described with reference to FIG. 3 and is different only in the method of demodulating address information. As shown in FIG. 5, in an address demodulating circuit 29, address information is demodulated using the difference signal 16S output  
35 from a differential amplifier 16. Other than this point, the optical disk device is of the same configuration as that of the optical disk device shown in FIG. 3, and thus the duplicate descriptions are omitted by referring to FIG. 5

in which like reference characters denote the corresponding components shown in FIG. 3.

The optical disk devices and the recording medium described above with reference to FIGs. 3 and 5, in which the recording medium is irradiated with a laser beam having an intensity of 1 mW while being rotated at a linear velocity of 8.2 m/second, were used to measure signal quality of a signal output from the summing amplifier 15 in an address area on the recording medium (namely, a sum signal of electric signals output from the photodetector 20 provided in the optical head 14) and a signal output from the differential amplifier 16 in the address area on the optical recording medium (namely, a difference signal of electric signals output from the photodetector 20 provided in the optical head 14).

FIGs. 6(A) and 6(B) are waveform charts exemplarily showing absolute voltage values of the sum signal and the difference signal output in reproducing the address area. The signal quality was measured by calculating an asymmetry X1 and an asymmetry X2 defined as follows.

As for the sum signal, where as shown in FIG. 6(A), the maximum amplitude is indicated as I1max, a voltage difference between a value that is highest in a portion of the waveform having the maximum amplitude and a value that is highest in a portion of the waveform having the minimum amplitude (the minimum amplitude is indicated as I1min) as I1 $\beta$ , and a voltage difference between a value that is lowest in the portion of the waveform having the minimum amplitude and a value that is lowest in the portion of the waveform having the maximum amplitude as I1 $\alpha$ , the asymmetry X1 is defined by the following expression:

$$X1 = (I1\beta - I1\alpha) / 2I1max.$$

As for the difference signal, where as shown in FIG. 6(B), the maximum amplitude is indicated as I2max, a voltage difference between a value that is highest in a portion of the waveform having the maximum amplitude and a value that is highest in a portion of the waveform having the minimum amplitude (the minimum amplitude is indicated as I2min) as I2 $\alpha$ , and a voltage difference between a value that is lowest in the portion of the waveform having the minimum amplitude and a value that is lowest in the portion of the waveform having the maximum amplitude as I2 $\beta$ , the asymmetry X2 is defined by the following expression:

$$X2 = (I2\beta - I2\alpha) / 2I2max.$$

The closer an asymmetry value of a signal comes to zero, the more

improved signal quality the signal has. Generally, it is preferable that the value falls within the range of  $\pm 0.1$ .

The measurement results are shown in FIG. 7. FIG. 7 shows asymmetry of the sum signal and asymmetry of the difference signal with respect to each address pit width. From these results, it is shown that the asymmetry of the difference signal (denoted by open circles in FIG. 7) has lower values than those of the asymmetry of the sum signal (denoted by solid circles in FIG. 7). It is also shown that the smaller an address pit width is, the smaller the difference in asymmetry values between these signals.

Conceivably, this phenomenon is attributable to the following.

FIGs. 8(A) and 8(B) show the relationship between an address pit and a beam spot of a laser beam in address reproduction. In FIG. 8(A), a beam spot 30 is on an address pit 9a having a length of  $11T$ . In FIG. 8(B), the beam spot 30 is on an address pit 9b having a length of  $3T$ . In FIGs. 8(A) and 8(B), a transverse direction indicates a peripheral direction of a recording medium, and the beam spot 30 scans in a direction indicated by an arrow.

In the case where the address pit is long as shown in FIG. 8(A), the address pit does not have edge portions in the peripheral direction that lie within the beam spot 30, so that the reflected laser beam is diffracted only in a direction perpendicular to the peripheral direction (namely, a radial direction of the recording medium) as in the case where the laser beam is reflected from a track area.

On the contrary, in the case where the address pit is short as shown in FIG. 8(B), the address pit has the edge portions in the peripheral direction that lie within the beam spot 30, so that the reflected laser beam is diffracted in the peripheral direction as well as the direction perpendicular to the peripheral direction. A portion of the reflected laser beam that is diffracted in the peripheral direction is incident on both of the light receiving parts 21 and 22 described with reference to FIG. 4. This produces the effect of decreasing the output of the differential amplifier 16. As a result, the asymmetry of the difference signal has lower values than those of the asymmetry of the sum signal.

It is presumed that the smaller an address pit width is, the smaller the difference in asymmetry values between the sum signal and the difference signal because a decrease in pit width lowers the intensity of the reflected laser beam that is diffracted in the edge portions in the peripheral

direction.

A large difference in asymmetry values between the sum signal and the difference signal leads to the difficulty in obtaining excellent signal quality for both of the sum signal and the difference signal. For example, when variations in asymmetry values caused by errors in pit length or the like are assumed to fall within the range of  $\pm 0.05$ , which is half as wide as the range of permissible asymmetry values described above, the difference in asymmetry values between the sum signal and the difference signal is required to be not more than 0.1 to secure the range. Of the recording media varied in pit width used in the test, the recording media having a pit width of not more than  $0.39 \mu\text{m}$  have proven to satisfy this condition. In a recording medium having a pit width of less than  $0.23 \mu\text{m}$ , a sufficient signal intensity of a reproduction signal cannot be obtained. Therefore, preferably, a pit width falls within the range of  $0.23 \mu\text{m}$  to  $0.39 \mu\text{m}$ .

It is conceivable that even if a pit width does not fall within the range employed in the above test, the aforementioned condition can be satisfied when a pit and a laser beam are optically similar in shape to those employed in the test. Thus, the address pit width  $W$  that was determined as a preferable width in the test falls within the range satisfying the following relationship:

$$W = k \cdot T_p / (\lambda / \text{NA})$$

$$0.40 \leq k \leq 0.68$$

with respect to a track pitch  $T_p$  and  $(\lambda / \text{NA})$  representing a spot diameter of a laser beam.

Furthermore, although an asymmetry value may vary depending on variations in address pit length, the asymmetry of the difference signal always has a lower value than that of the asymmetry of the sum signal. Therefore, by forming an address pit into a shape that allows an asymmetry value of the sum signal to fall within the range of 0 to 0.05, an address reproduction signal having further improved signal quality can be obtained in both of the cases of the sum signal and the difference signal.

In the aforementioned embodiment, a GeSbTe alloy of a phase change material was used as the recording layer. However, the recording layer may be formed of a material other than a GeSbTe alloy such as a magneto-optical recording material and an organic dye. Further, the recording medium that can be used is not limited to an erasable recording medium that allows rewriting of information. A recordable recording

medium on which information can be recorded only once also may be used. Furthermore, the substrate may be formed of a material other than polycarbonate such as glass and acrylic. Moreover, the address pits may be arranged in a row instead of in the form of staggered pit strings. In addition, in the aforementioned embodiment, the tracks 3 were in the form of a spiral. However, the tracks 3 may take the form of concentric circles.

### Second Embodiment

A second embodiment relates to an optical disk device employing the optical recording medium described above.

FIG. 9 is a block diagram showing the configuration of an optical disk device of an embodiment according to the present invention. The optical disk device has substantially the same configuration as those described with reference to FIGs. 3 and 5 and is different only in the method of demodulating address information. As shown in FIG. 9, a first address demodulating circuit 17 demodulates address information using a sum signal 15S output from a summing amplifier 15, and a second address demodulating circuit 29 demodulates address information using a difference signal 16S output from a differential amplifier 16.

These two address demodulating circuits 17 and 29 are provided in the device, so that even when the recording medium 1 has variations in address forming conditions, an address can be detected with high accuracy using at least one of the address demodulating circuits. Furthermore, in the case where the optical recording medium of the present invention described in the first embodiment is used as the recording medium 1, address information can be demodulated in both of the address demodulating circuits 17 and 29, and thus the accuracy of address detection further can be increased.

The duplicate descriptions are omitted by referring to FIG. 9 in which like reference characters denote the corresponding components shown in FIGs. 3 and 5.

The embodiments disclosed in this application are intended to illustrate the technical aspects of the invention and not to limit the invention thereto. The invention may be embodied in other forms without departing from the spirit and the scope of the invention as indicated by the appended claims and is to be broadly construed.

## CLAIMS

1. An optical recording medium for recording, reproducing, or erasing information by irradiation with a laser beam, comprising a disk-shaped transparent substrate and a recording layer formed on the substrate,  
 5 wherein information tracks and addresses are provided on the substrate, the information tracks including groove tracks and land tracks that are arranged alternately in the form of a spiral or concentric circles, each of the addresses indicating a position on the recording medium and  
 10 being composed of uneven strings of pits,  
 the strings of the pits are arranged so that center lines of the strings of the pits are shifted in a radial direction of the recording medium at a distance of about one-half of a track pitch from center lines of the groove tracks and center lines of the land tracks, and  
 15 a pit width W of the pits satisfies the relationship:  

$$W = k \cdot T_p / (\lambda / NA)$$
  

$$0.40 \leq k \leq 0.68$$
  
 with respect to a laser wavelength  $\lambda$  and a numerical aperture NA of an objective lens of an optical head of an optical disk device being used, and a  
 20 track pitch  $T_p$  of the recording medium.
2. The optical recording medium according to claim 1,  
 wherein an optical head of an optical disk device being used has a laser wavelength of about 650 nm and a numerical aperture of an objective lens of about 0.6,  
 25 the recording medium has a track pitch of about 0.62  $\mu\text{m}$ , and  
 the pits have a pit width W that falls within the range of 0.23  $\mu\text{m}$  to 0.39  $\mu\text{m}$ .
3. A substrate for an optical recording medium for recording, reproducing, or erasing information by irradiation with a laser beam,  
 30 wherein information tracks and addresses are provided on one face of the substrate, the information tracks including groove tracks and land tracks that are arranged alternately in the form of a spiral or concentric circles, each of the addresses indicating a position on the recording medium and being composed of uneven strings of pits,,  
 35 the strings of the pits are arranged so that center lines of the strings of the pits are shifted in a radial direction of the recording medium at a distance of about one-half of a track pitch from center lines of the groove



information tracks including groove tracks and land tracks that are arranged alternately in the form of a spiral or concentric circles, each of the addresses indicating a position on the recording medium and being composed of uneven strings of pits,

5 the strings of the pits are arranged so that center lines of the strings of the pits are shifted in a radial direction of the recording medium at a distance of about one-half of a track pitch from center lines of the groove tracks and center lines of the land tracks, and

a pit width W of the pits satisfies the relationship:

10 
$$W = k \cdot T_p / (\lambda / NA)$$

$$0.40 \leq k \leq 0.68$$

with respect to a laser wavelength  $\lambda$  and a numerical aperture NA of an objective lens of the optical head, and a track pitch  $T_p$  of the recording medium.

15



(12)特許協力条約に基づいて公開された国際出願

(19) 世界知的所有権機関  
国際事務局



(43) 国際公開日  
2001 年 4 月 26 日 (26.04.2001)

PCT

(10) 国際公開番号  
WO 01/29834 A1

(51) 国際特許分類: G11B 7/004, 7/007, 7/24

(21) 国際出願番号: PCT/JP00/06292

(22) 国際出願日: 2000 年 9 月 13 日 (13.09.2000)

(25) 国際出願の言語: 日本語

(26) 国際公開の言語: 日本語

(30) 優先権データ:  
特願平 11/296389  
1999 年 10 月 19 日 (19.10.1999) JP

(71) 出願人 (米国を除く全ての指定国について): 松下電器産業株式会社 (MATSUSHITA ELECTRIC INDUSTRIAL CO., LTD.) [JP/JP]; 〒571-8501 大阪府門真市大字門真 1006 番地 Osaka (JP).

(72) 発明者; および

(75) 発明者/出願人 (米国についてのみ): 秋山哲也 (AKIYAMA, Tetsuya) [JP/JP]; 〒573-0084 大阪府枚方市香里ヶ丘 9-13-1-308 Osaka (JP). 西内健一 (NISHIUCHI, Kenichi) [JP/JP]; 〒573-1135 大阪府枚方市招

提平野町 6 番 22 号 Osaka (JP). 古川恵昭 (FURUKAWA, Shigeaki) [JP/JP]; 〒571-0026 大阪府門真市北島町 18-6 はしだハイツ 202 号室 Osaka (JP). 三宅知義 (MIYAKE, Tomoyoshi) [JP/JP]; 〒518-0425 三重県名張市つつじが丘南 5 番町 239 番地 Mie (JP). 佃 雅彦 (TSUKUDA, Masahiko) [JP/JP]; 〒570-0032 大阪府守口市菊水通 1-16-22 松楠寮 228 号室 Osaka (JP).

(74) 代理人: 池内寛幸, 外 (IKEUCHI, Hiroyuki et al.); 〒530-0047 大阪府大阪市北区西天満 4 丁目 3 番 25 号 梅田ブラザビル 401 号室 Osaka (JP).


(81) 指定国 (国内): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, US, UZ, VN, YU, ZA, ZW.

(84) 指定国 (広域): ARIPO 特許 (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW), ユーラシア特許 (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), ヨーロッパ特許 (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI 特許 (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

[続葉有]

(54) Title: OPTICAL RECORDING MEDIUM, SUBSTRATE FOR OPTICAL RECORDING MEDIUM AND OPTICAL DISK DEVICE

(54) 発明の名称: 光学式記録媒体、光学式記録媒体用基板及び光ディスク装置

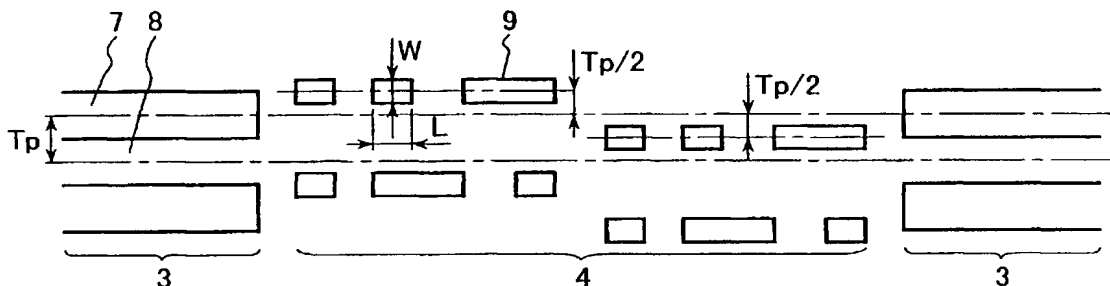

(57) Abstract: The width  $W$  of the address pit (9) of an optical recording medium of intermediate address type is determined by  $W = k \cdot T_p / (\lambda / NA)$  where  $\lambda$  is the laser wavelength of the optical head of the optical disk device used,  $NA$  is the numerical aperture of the objective,  $T_p$  is the track pitch of the record medium, and  $k$  is  $0.40 \leq k \leq 0.68$ . Alternatively, an optical device comprises a first address demodulating circuit for demodulating address information by using a signal that is the sum of the electric signals outputted from a pair of photodetectors separated in the direction of the track and a second address demodulating circuit for demodulating address information by using a signal that is the difference between the electric signals. The address is detected based on the information thus obtained. In such a way, the compatibility of the recording medium used and that of the optical device are improved, the reproduction margin in demodulating the address information is increased, realizing high accuracy address detection when reproducing data from an optically recorded medium of intermediated address type.

[続葉有]

WO 01/29834 A1

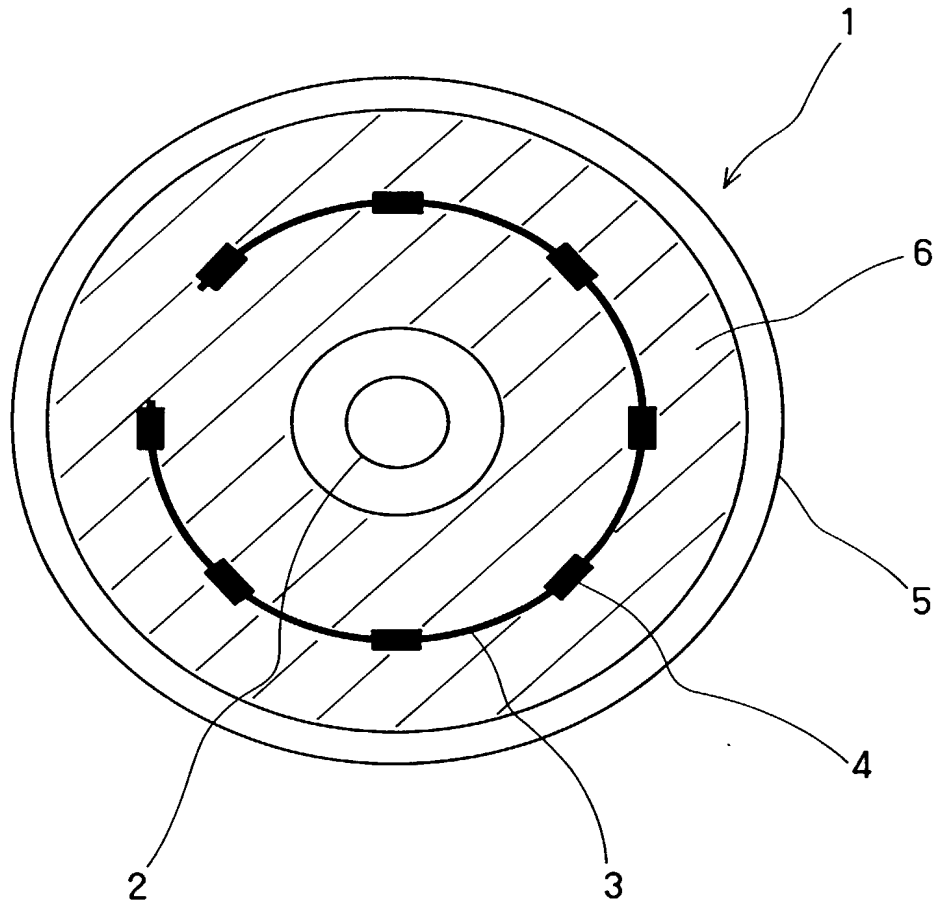


FIG . 1

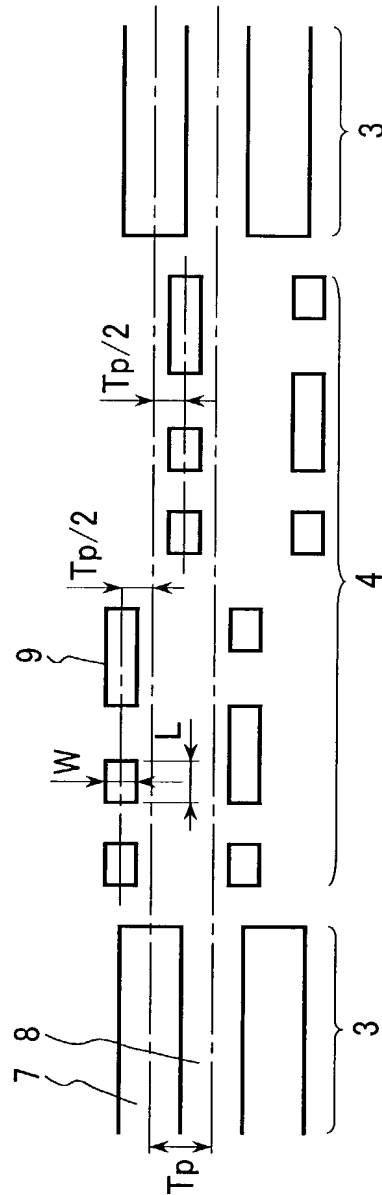


FIG. 2

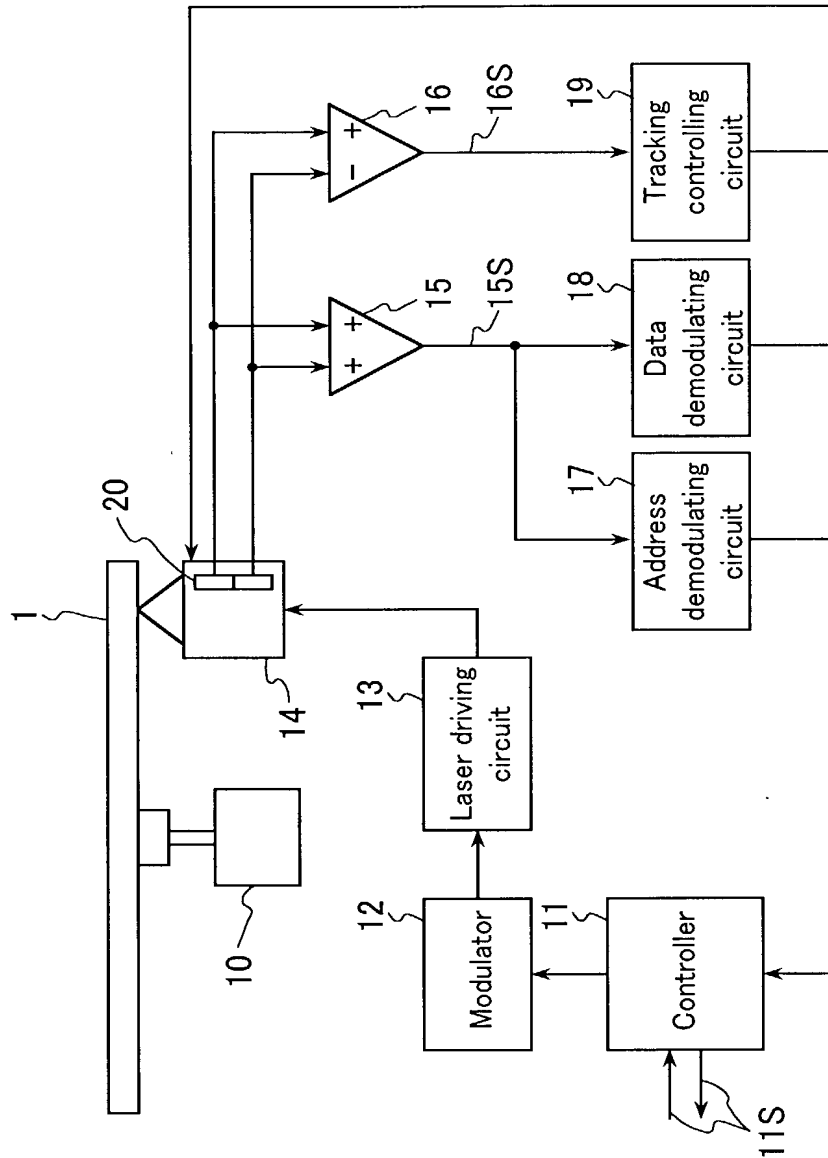


FIG. 3

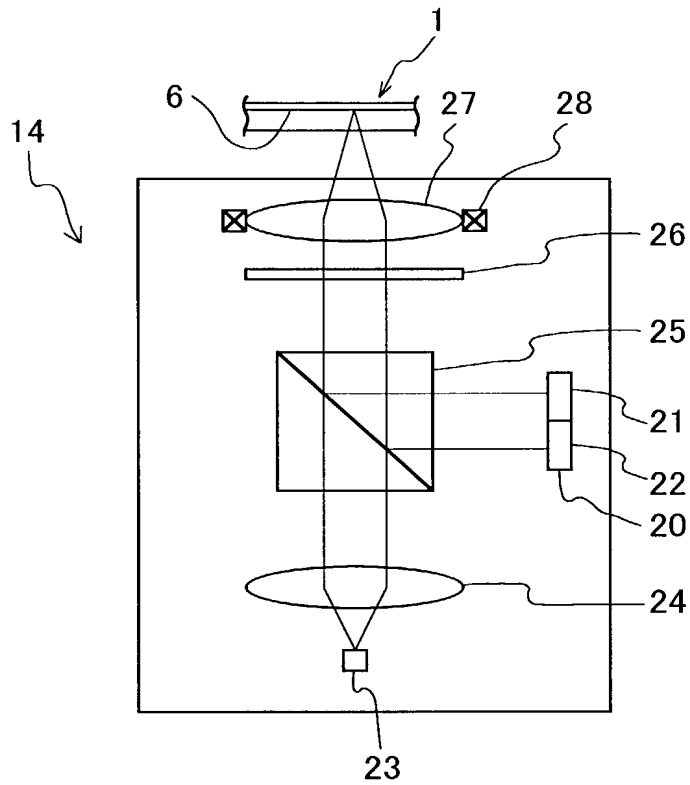


FIG. 4

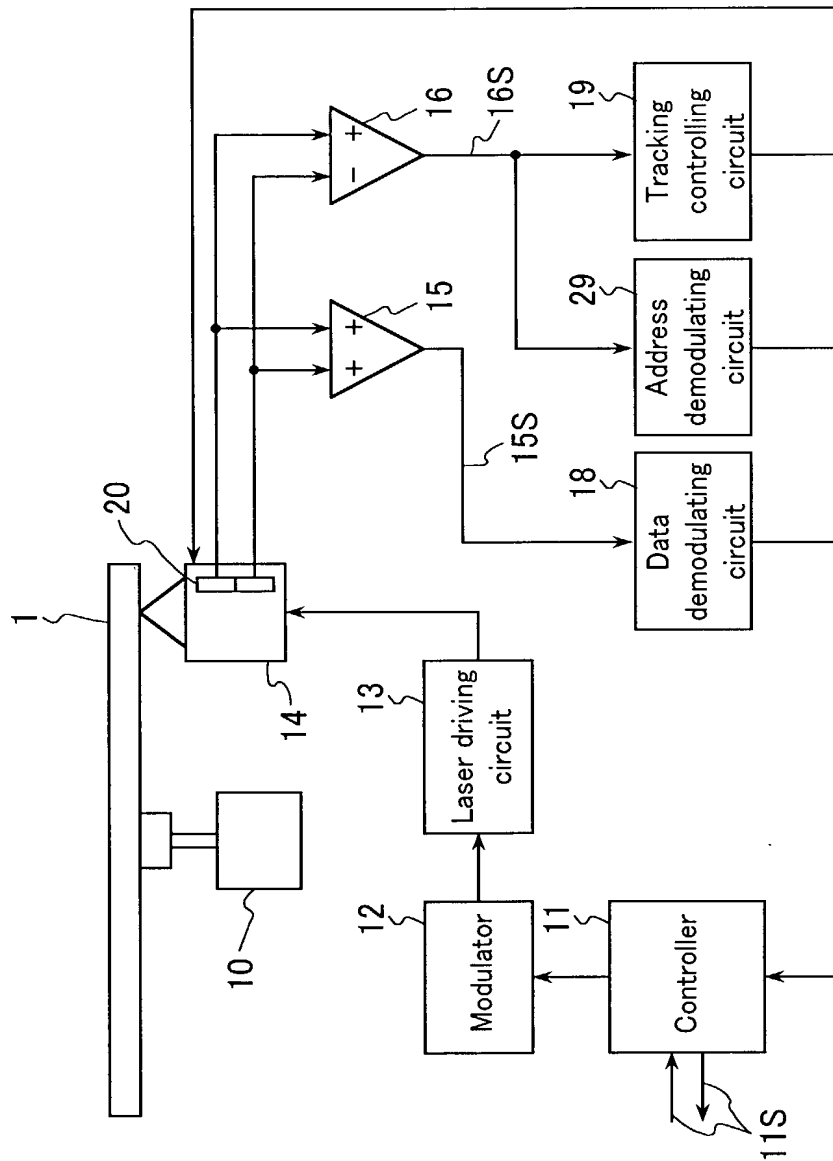


FIG. 5

10/089402

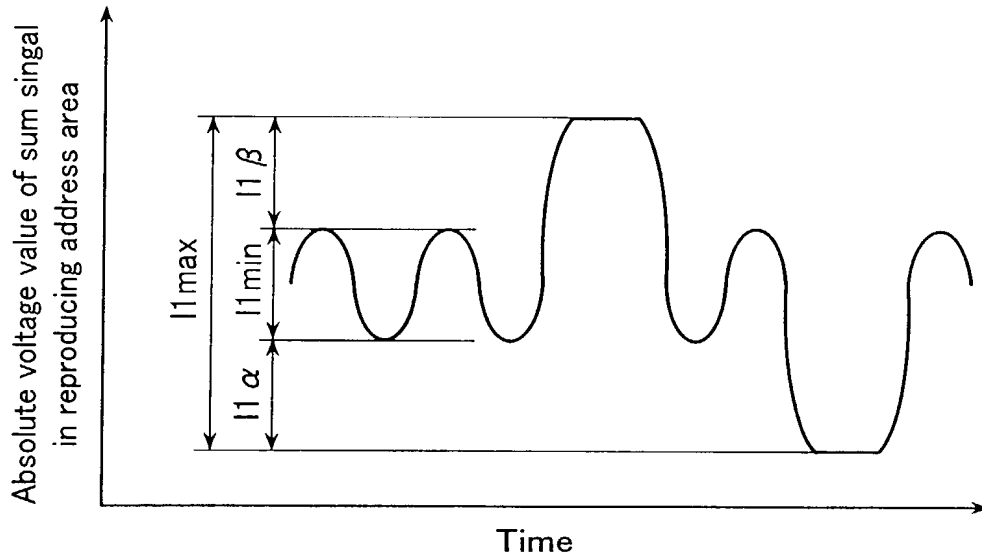


FIG . 6A

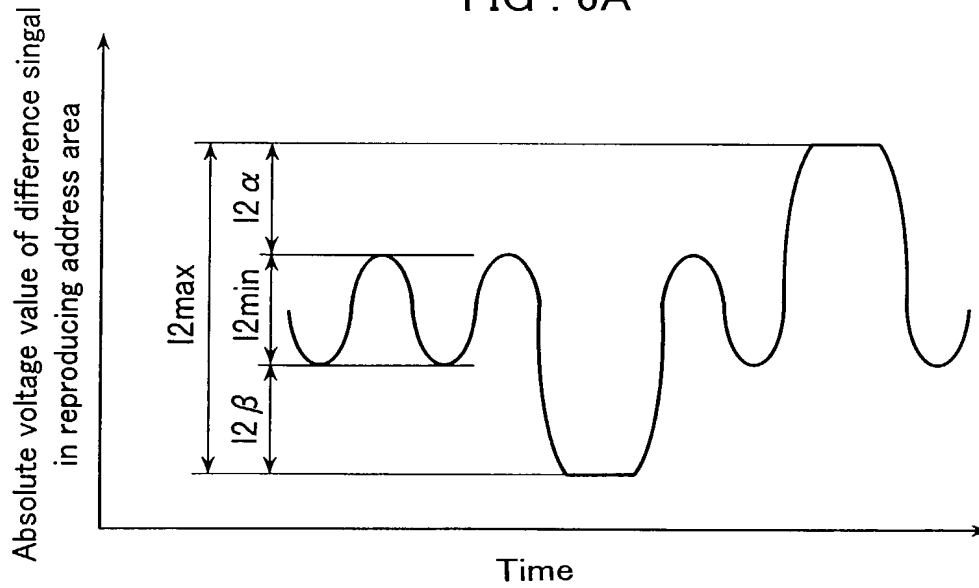


FIG . 6B

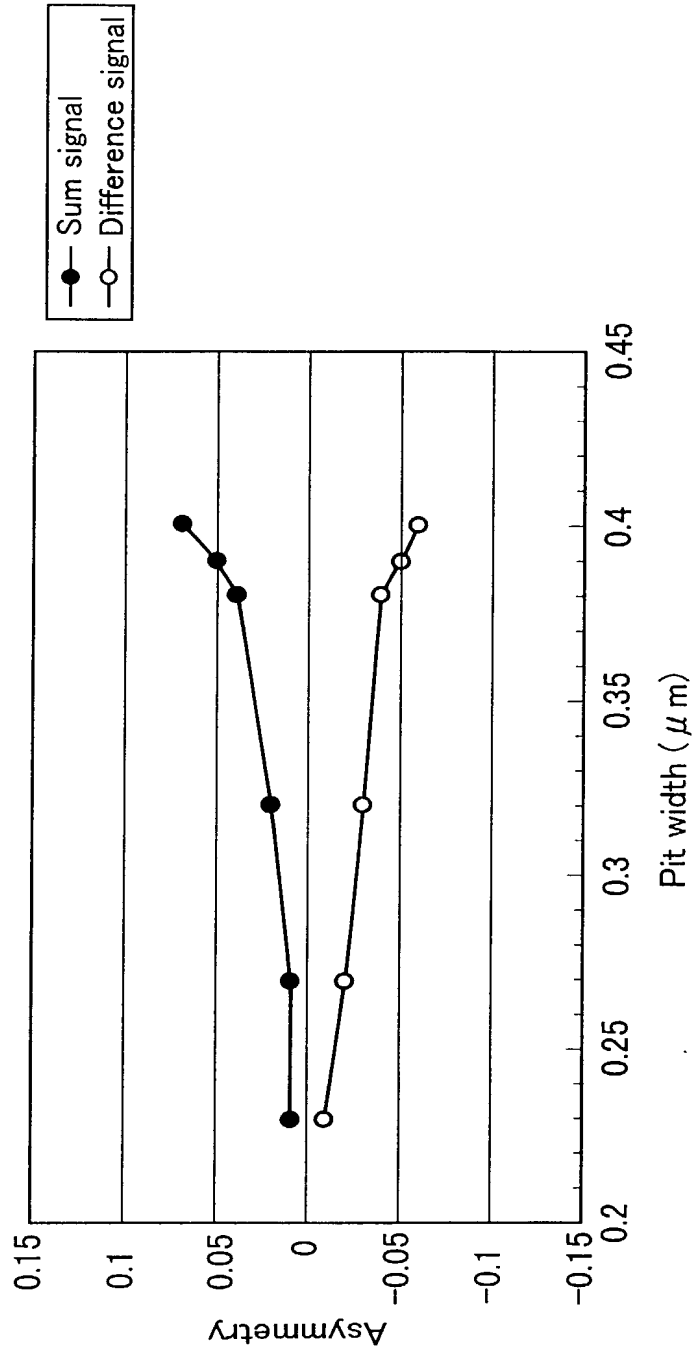


FIG. 7



10/089402

FIG . 8A


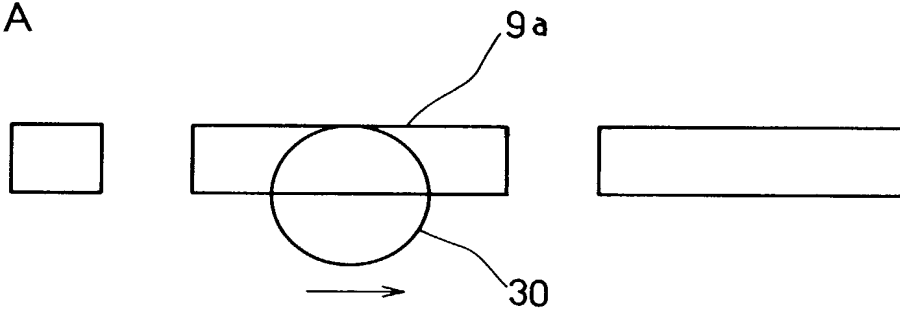


FIG . 8B

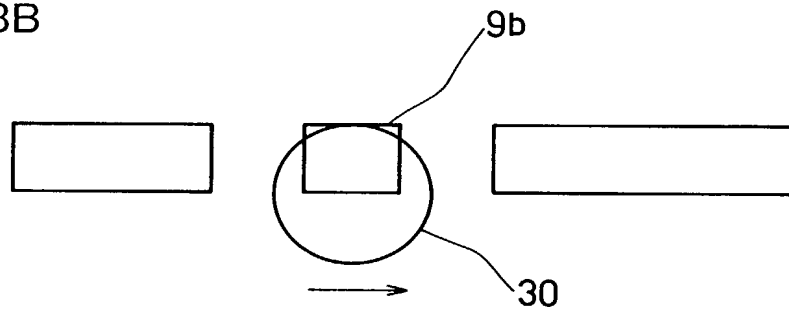

10/089402

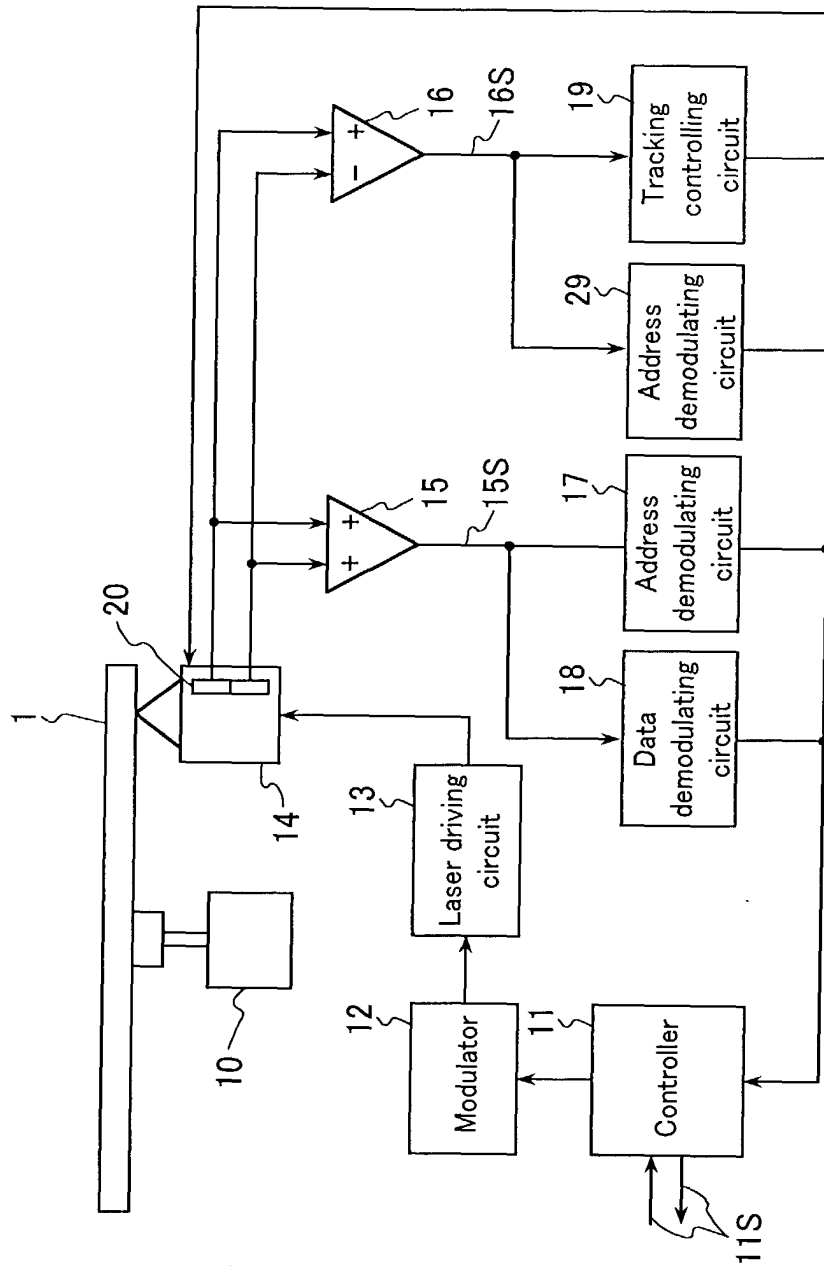


FIG. 9

10/089402

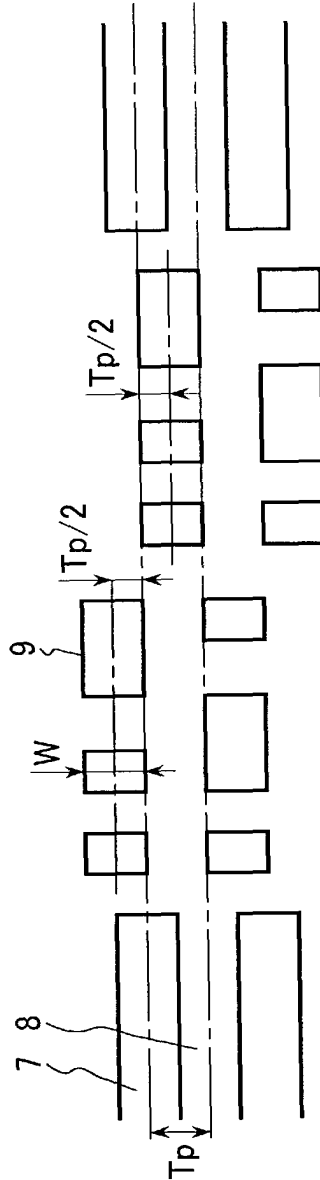


FIG. 10

MERCHANT &amp; GOULD P.C.

## United States Patent Application

## COMBINED DECLARATION AND POWER OF ATTORNEY

As a below named inventor I hereby declare that: my residence, post office address and citizenship are as stated below next to my name; that

I verily believe I am the original, first and sole inventor (if only one name is listed below) or a joint inventor (if plural inventors are named below) of the subject matter which is claimed and for which a patent is sought on the invention entitled: OPTICAL RECORDING MEDIUM, SUBSTRATE FOR OPTICAL RECORDING MEDIUM AND OPTICAL DISK DEVICE

The specification of which

- a. ☐ is attached hereto  
b. ☒ was filed on as application serial no. and was amended on (if applicable) (in the case of a PCT-filed application) described and claimed in international no. PCT/JP00/06292 filed September 13, 2000 and as amended on August 9, 2001 (if any), which I have reviewed and for which I solicit a United States patent.

I hereby state that I have reviewed and understand the contents of the above-identified specification, including the claims, as amended by any amendment referred to above.

I hereby claim foreign priority benefits under Title 35, United States Code, § 119/365 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on the basis of which priority is claimed:

- a. ☐ no such applications have been filed.  
b. ☒ such applications have been filed as follows:

FOREIGN APPLICATION(S), IF ANY, CLAIMING PRIORITY UNDER 35 USC § 119			
COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	DATE OF ISSUE (day, month, year)
Japan	11-296389	October 19, 1999	
ALL FOREIGN APPLICATION(S), IF ANY, FILED BEFORE THE PRIORITY APPLICATION(S)			
COUNTRY	APPLICATION NUMBER	DATE OF FILING (day, month, year)	DATE OF ISSUE (day, month, year)

I hereby claim the benefit under Title 35, United States Code, § 120/365 of any United States and PCT international application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, § 112, I acknowledge the duty to disclose material information as defined in Title 37, Code of Federal Regulations, § 1.56(a) which occurred between the filing date of the prior application and the national or PCT international filing date of this application.

U.S. APPLICATION NUMBER	DATE OF FILING (day, month, year)	STATUS (patented, pending, abandoned)

I hereby claim the benefit under Title 35, United States Code § 119(e) of any United States provisional application(s) listed below:

U.S. PROVISIONAL APPLICATION NUMBER	DATE OF FILING (Day, Month, Year)



I acknowledge the duty to disclose information that is material to the patentability of this application in accordance with Title 37, Code of Federal Regulations, § 1.56 (reprinted below)

**§ 1.56 Duty to disclose information material to patentability.**

(a) A patent by its very nature is affected with a public interest. The public interest is best served, and the most effective patent examination occurs when, at the time an application is being examined, the Office is aware of and evaluates the teachings of all information material to patentability. Each individual associated with the filing and prosecution of a patent application has a duty of candor and good faith in dealing with the Office, which includes a duty to disclose to the Office all information known to that individual to be material to patentability as defined in this section. The duty to disclose information exists with respect to each pending claim until the claim is canceled or withdrawn from consideration, or the application becomes abandoned. Information material to the patentability of a claim that is canceled or withdrawn from consideration need not be submitted if the information is not material to the patentability of any claim remaining under consideration in the application. There is no duty to submit information which is not material to the patentability of any existing claim. The duty to disclose all information known to be material to patentability is deemed to be satisfied if all information known to be material to patentability of any claim issued in a patent was cited by the Office or submitted to the Office in the manner prescribed by §§ 1.97(b)-(d) and 1.98. However, no patent will be granted on an application in connection with which fraud on the Office was practiced or attempted or the duty of disclosure was violated through bad faith or intentional misconduct. The Office encourages applicants to carefully examine:

- (1) prior art cited in search reports of a foreign patent office in a counterpart application, and
  - (2) the closest information over which individuals associated with the filing or prosecution of a patent application believe any pending claim patentably defines, to make sure that any material information contained therein is disclosed to the Office.
- (b) Under this section, information is material to patentability when it is not cumulative to information already of record or being made of record in the application, and
- (1) It establishes, by itself or in combination with other information, a prima facie case of unpatentability of a claim;
- or
- (2) It refutes, or is inconsistent with, a position the applicant takes in:
    - (i) Opposing an argument of unpatentability relied on by the Office, or
    - (ii) Asserting an argument of patentability.

A prima facie case of unpatentability is established when the information compels a conclusion that a claim is unpatentable under the preponderance of evidence, burden-of-proof standard, giving each term in the claim its broadest reasonable construction consistent with the specification, and before any consideration is given to evidence which may be submitted in an attempt to establish a contrary conclusion of patentability.

- (c) Individuals associated with the filing or prosecution of a patent application within the meaning of this section are:
- (1) Each inventor named in the application;
  - (2) Each attorney or agent who prepares or prosecutes the application; and
  - (3) Every other person who is substantively involved in the preparation or prosecution of the application and who is associated with the inventor, with the assignee or with anyone to whom there is an obligation to assign the application.
- (d) Individuals other than the attorney, agent or inventor may comply with this section by disclosing information to the attorney, agent, or inventor
- (e) In any continuation-in-part application, the duty under this section includes the duty to disclose to the Office all information known to the person to be material to patentability, as defined in paragraph (b) of this section, which became available between the filing date of the prior application and the national or PCT international filing date of the continuation-in-part application.

I hereby appoint the following attorney(s) and/or patent agent(s) to prosecute this application and to transact all business in the Patent and Trademark Office connected herewith:

Albrecht, John W.	Reg. No. 40,481	Leonard, Christopher J.	Reg. No. 41,940
Ali, M. Jeffer	Reg. No. 46,359	Liepa, Mara E.	Reg. No. 40,066
Alterra, Allan G.	Reg. No. 40,274	Lindquist, Timothy A.	Reg. No. 40,701
Anderson, Gregg I.	Reg. No. 28,828	Lown, Jean A.	Reg. No. 48,428
Batzli, Brian H.	Reg. No. 32,960	Mayfield, Denise L.	Reg. No. 33,732
Beard, John L.	Reg. No. 27,612	McDonald, Daniel W.	Reg. No. 32,044
Berns, John M.	Reg. No. 43,496	McIntyre, Jr., William F.	Reg. No. 44,921
Branch, John W.	Reg. No. 41,633	Mitchem, M. Todd	Reg. No. 40,731
Brown, Jeffrey C.	Reg. No. 41,643	Mueller, Douglas P.	Reg. No. 30,300
Bruess, Steven C.	Reg. No. 34,130	Nelson, Anna M.	Reg. No. 48,935
Byrne, Linda M.	Reg. No. 32,404	Paley, Kenneth B.	Reg. No. 38,989
Campbell, Keith	Reg. No. 46,597	Parsons, Nancy J.	Reg. No. 40,364
Carlson, Alan G.	Reg. No. 25,959	Pauly, Daniel M.	Reg. No. 40,123
Caspers, Philip P.	Reg. No. 33,227	Phillips, John B.	Reg. No. 37,206
Clifford, John A.	Reg. No. 30,247	Pino, Mark J.	Reg. No. 43,858
Cook, Jeffrey	Reg. No. 48,649	Prendergast, Paul	Reg. No. 46,068
Daignault, Ronald A.	Reg. No. 25,968	Pytel, Melissa J.	Reg. No. 41,512
Daley, Dennis R.	Reg. No. 34,994	Qualey, Terry	Reg. No. 25,148
Daulton, Julie R.	Reg. No. 36,414	Reich, John C.	Reg. No. 37,703
DeVries Smith, Katherine M.	Reg. No. 42,157	Reiland, Earl D.	Reg. No. 25,767
DiPietro, Mark J.	Reg. No. 28,707	Samuels, Lisa A.	Reg. No. 43,080
Doscotch, Matthew A.	Reg. No. P-48,957	Schmaltz, David G.	Reg. No. 39,828
Edell, Robert T.	Reg. No. 20,187	Schuman, Mark D.	Reg. No. 31,197
Epp Ryan, Sandra	Reg. No. 39,667	Schumann, Michael D.	Reg. No. 30,422
Glance, Robert J.	Reg. No. 40,620	Scull, Timothy B.	Reg. No. 42,137
Goff, Jared S.	Reg. No. 44,716	Sebald, Gregory A.	Reg. No. 33,280
Goggin, Matthew J.	Reg. No. 44,125	Skoog, Mark T.	Reg. No. 40,178
Golla, Charles E.	Reg. No. 26,896	Spellman, Steven J.	Reg. No. 45,124
Gorman, Alan G.	Reg. No. 38,472	Stewart, Alan R.	Reg. No. 47,974
Gould, John D.	Reg. No. 18,223	Stoll-DeBell, Kirstin L.	Reg. No. 43,164
Gregson, Richard	Reg. No. 41,804	Sullivan, Timothy	Reg. No. 47,981
Gresens, John J.	Reg. No. 33,112	Sumner, John P.	Reg. No. 29,114
Hamer, Samuel A.	Reg. No. 46,754	Swenson, Erik G.	Reg. No. 45,147
Hamre, Curtis B.	Reg. No. 29,165	Tellekson, David K.	Reg. No. 32,314
Harrison, Kevin C.	Reg. No. 46,759	Trembath, Jon R.	Reg. No. 38,344
Hertzberg, Brett A.	Reg. No. 42,660	Tunheim, Marcia A.	Reg. No. 42,189
Hillson, Randall A.	Reg. No. 31,838	Underhill, Albert L.	Reg. No. 27,403
Holzer, Jr., Richard J.	Reg. No. 42,668	Vandenburgh, J. Derek	Reg. No. 32,179
Hope, Leonard J.	Reg. No. 44,774	Wahl, John R.	Reg. No. 33,044
Jardine, John S.	Reg. No. P-48,835	Weaver, Paul L.	Reg. No. 48,640
Johns, Nicholas P.	Reg. No. 48,995	Welter, Paul A.	Reg. No. 20,890
Johnston, Scott W.	Reg. No. 39,721	Whipps, Brian	Reg. No. 43,261
Kadievitch, Natalie D.	Reg. No. 34,196	Whitaker, John E.	Reg. No. 42,222
Kaseburg, Frederick A.	Reg. No. 47,695	Wier, David D.	Reg. No. P-48,229
Kettelberger, Denise	Reg. No. 33,924	Williams, Douglas J.	Reg. No. 27,054
Keys, Jeramie J.	Reg. No. 42,724	Withers, James D.	Reg. No. 40,376
Knearl, Homer L.	Reg. No. 21,197	Witt, Jonelle	Reg. No. 41,980
Kowalchyk, Alan W.	Reg. No. 31,535	Wong, Thomas S.	Reg. No. 48,577
Kowalchyk, Katherine M.	Reg. No. 36,848	Wu, Tong	Reg. No. 43,361
Lacy, Paul E.	Reg. No. 38,946	Young, Thomas	Reg. No. 25,796
Larson, James A.	Reg. No. 40,443	Zeuli, Anthony R.	Reg. No. 45,255

I hereby authorize them to act and rely on instructions from and communicate directly with the person/assignee/attorney/firm/ organization who/which first sends/sent this case to them and by whom/which I hereby declare that I have consented after full disclosure to be represented unless/until I instruct Merchant & Gould P.C. to the contrary.


I understand that the execution of this document, and the grant of a power of attorney, does not in itself establish an attorney-client relationship between the undersigned and the law firm Merchant & Gould P.C., or any of its attorneys.



Patent & Trademark Office

Please direct all correspondence in this case to Merchant & Gould P.C. at the address indicated below:

Merchant & Gould P.C.  
P.O. Box 2903  
Minneapolis, MN 55402-0903

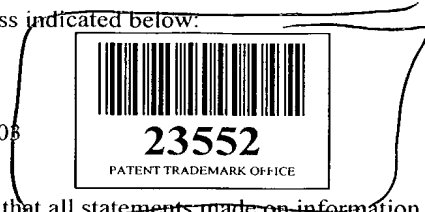

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

2	Full Name Of Inventor <u>1-00</u>	Family Name AKIYAMA	First Given Name Tetsuya	Second Given Name
0	Residence & Citizenship	City Osaka	State or Foreign Country Japan <u>JPX</u>	Country of Citizenship Japan
1	Mailing Address	Address 9-13-1-308, Kohrigaoka, Hirakata-shi		City Osaka
Signature of Inventor 201: <u>Tetsuya Akiyama</u>				Date: <u>January 23, 2002</u>
2	Full Name Of Inventor <u>2-00</u>	Family Name NISHIUCHI	First Given Name Kenichi	Second Given Name
0	Residence & Citizenship	City Osaka	State or Foreign Country Japan <u>JPX</u>	Country of Citizenship Japan
2	Mailing Address	Address 6-22, Shoudaihirano-cho, Hirakata-shi		City Osaka
Signature of Inventor 202: <u>Kenichi Nishiuchi</u>				Date: <u>January 23, 2002</u>
2	Full Name Of Inventor <u>3-00</u>	Family Name FURUKAWA	First Given Name Shigeaki	Second Given Name
0	Residence & Citizenship	City Osaka	State or Foreign Country Japan <u>JPX</u>	Country of Citizenship Japan
3	Mailing Address	Address Room 202, Hashida-Haitu, 18-6, Kitajuma-cho, Kadoma-shi		City Osaka
Signature of Inventor 203: <u>Shigeaki Furukawa</u>				Date: <u>January 23, 2002</u>
2	Full Name Of Inventor <u>4-00</u>	Family Name MIYAKE	First Given Name Tomoyoshi	Second Given Name
0	Residence & Citizenship	City Mie	State or Foreign Country Japan <u>JPX</u>	Country of Citizenship Japan
4	Mailing Address	Address 239, Minami-5, Tsutsujigaoka, Nabari-shi		City Mie
Signature of Inventor 204: <u>Tomoyoshi Miyake</u>				Date: <u>January 25, 2002</u>



2	<b>Full Name Of Inventor</b>	<b>Family Name</b> TSUKUDA	<b>First Given Name</b> Masahiko	<b>Second Given Name</b>
0	<b>Residence &amp; Citizenship</b>	<b>City</b> Osaka	<b>State or Foreign Country</b> Japan	<b>Country of Citizenship</b> Japan
5	<b>Mailing Address</b>	<b>Address</b> Room 228, Shonanryo, 1-16-22, Kikusuidori, Moriguchi-shi	<b>City</b> Osaka	<b>State &amp; Zip Code/Country</b> 570-0032 / Japan
<b>Signature of Inventor 205:</b> Masahiko Tsukuda			<b>Date:</b> January 31, 2002	